

OFF / Brightness

OFF 4x OFF 3x

2s

Transportation Lock

Adapter setup

1/4" 5/8"

360°

Usable with wall mount

±13mm ±45mm

Adapter and wall mount setup

Usable with Receiver

SK106GD

- Status LED
- ON / Set key
- Battery (optional)
- Window vertical line
- Window horizontal line
- Levelling lock
- Transportation lock
- Tripod thread 1/4"
- Window of plumbing
- DC jack

www.makita.com


	LASER 2	
IEC 60825-1:2014	A=525nm Pmax<1mW tp=45-70µs	

www.makita.com


Insert Makita battery (optional)




① 1x - Laser on

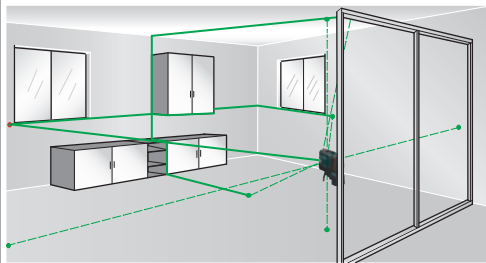

① 2x - Horizontal mode

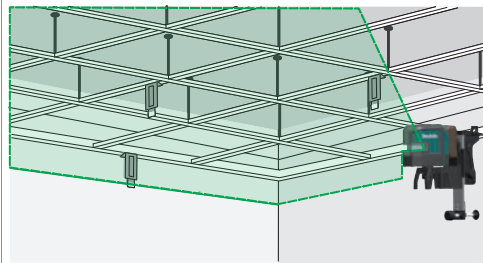

① 3x - Vertical mode

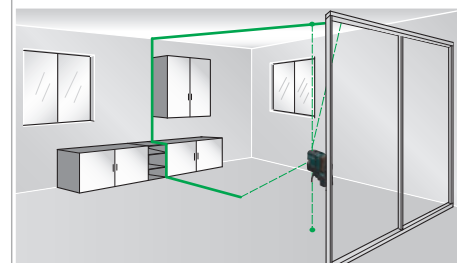


External power supply



Self levelling / Levelling lock



🔒 ① 1x ——— ① 2x |

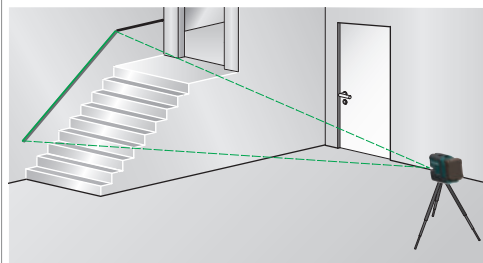

Status LED

